

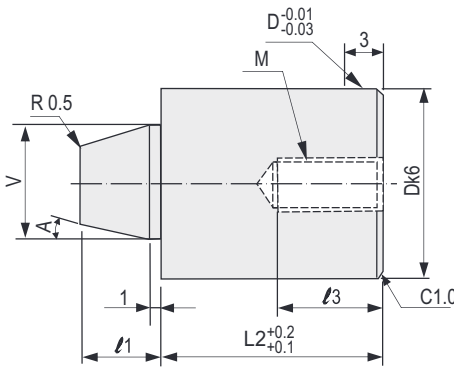


TAPER INTERLOCKS (ROUND)

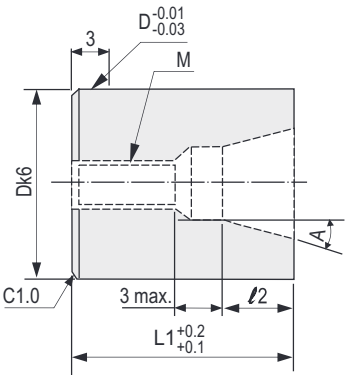

IMDC CODE	A	D k6	V	L	L1	L2	ℓ1	ℓ2	ℓ3	M
TL-13	5°	13	8.5	30	14	14	6	5	10	M4
TL-16		16	10	30	14	14	6	5	10	M5
TL-20		20	13	40	19	19	9	8	12	M6
TL-25		25	16	50	24	24	12	11	16	M8
TL-30		30	20	60	29	29	15	14	20	N10
TL-32		32	20	60	29	29	15	14	20	M10
TL-35		35	24	70	34	34	18	17	24	M12
TL-42		42	30	80	39	39	24	23	24	M12

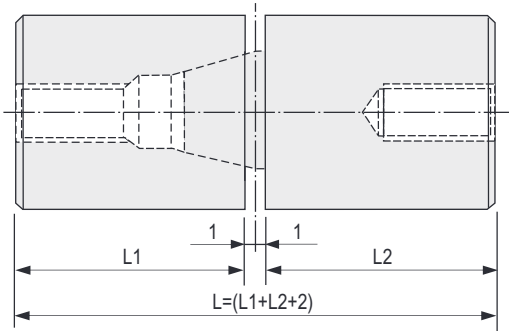


STRAIGHT SIDE INTERLOCKS


Suites best for positioning in precision molds.
It can perform positioning before core pins are inlayed

Notes

Having side  and side  in contact when mold is closed may cause damage.
Please leave a space of about 1mm.

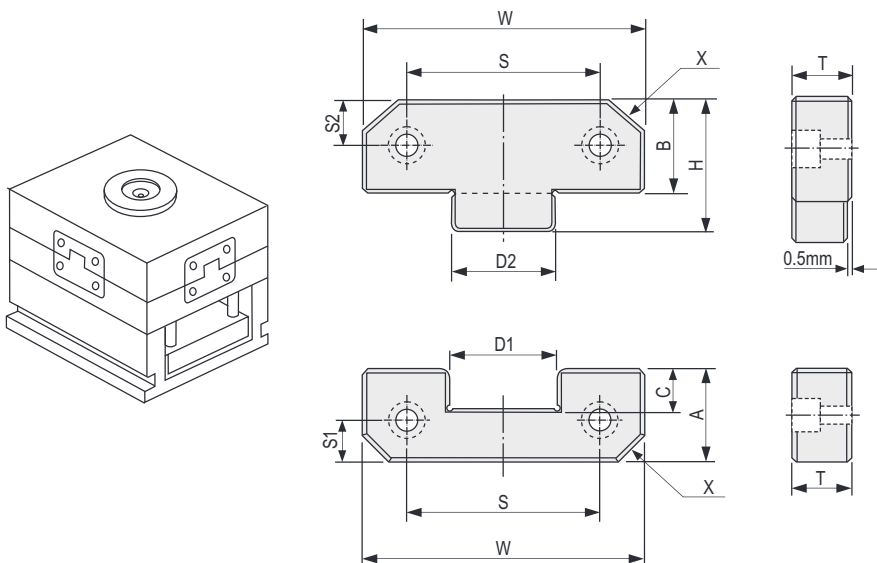

Example

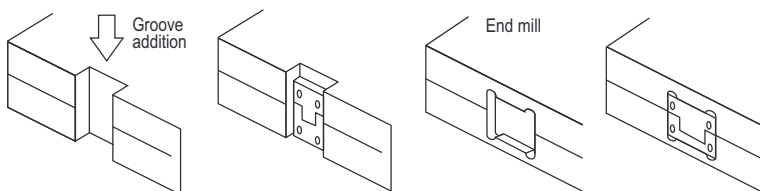

IMDC CODE	W 0 -0.01	T	A	B	C	D1 +0.010 +0.005	D2 0 -0.005	H	S	S1	S2	X	SHCS
GPL38	38	13	22	22	8.5	12	12	30	22	7	7	5	M6
GPL50	50	16	21.5	21.5	9.5	17	17	30	34	11	11	5	M6
GPL75	75	19	36	36	15	25	25	50	50	18	18	8	M10
GPL100	100	19	45	45	21	35	35	65	70	22	22	10	M10
GPL125	125	25	45	45	21	45	45	65	84	22	22	10	M10